

CATALOG

SHENZHEN FOCUS LIGHTING CO., LTD

PRODUCTS FOR
STREET & WAREHOUSE & WORKSHOP & STADIUM LIGHTING



Shenzhen Focus Lighting Co., Ltd.

Add: 601, No. 10, Huanguan South Road, Junzibu Community, Guanlan Street
Longhua District, Shenzhen City, Guangdong, China

Email: info@fi-sz.com

Tel: 0086-15219502021

Web: www.fi-sz.com

2021



Company Profile

Shenzhen Focus Lighting Co., Limited was founded in 2010, it's a professional manufacturer which specialized in research and developing, producing and exporting led lighting products.

Products are get CE ROHS TUV SAA ETL Certification. Mainly produce industrial and commercial lighting and export to Europe, USA, Canada, Australian, and other high-end market. Factory totally 2200 square meters, with a professional team of over 50 personnel. We insist honest, professional high quality and excellent service.

Factory Tour:



Certification:



CONTENTS

LED HID replacement bulb1-4



LED temporary work light5



LED street light6-8




Slim LED flood light9-10




LED high mast light11-14



UFO LED highbay light15-20

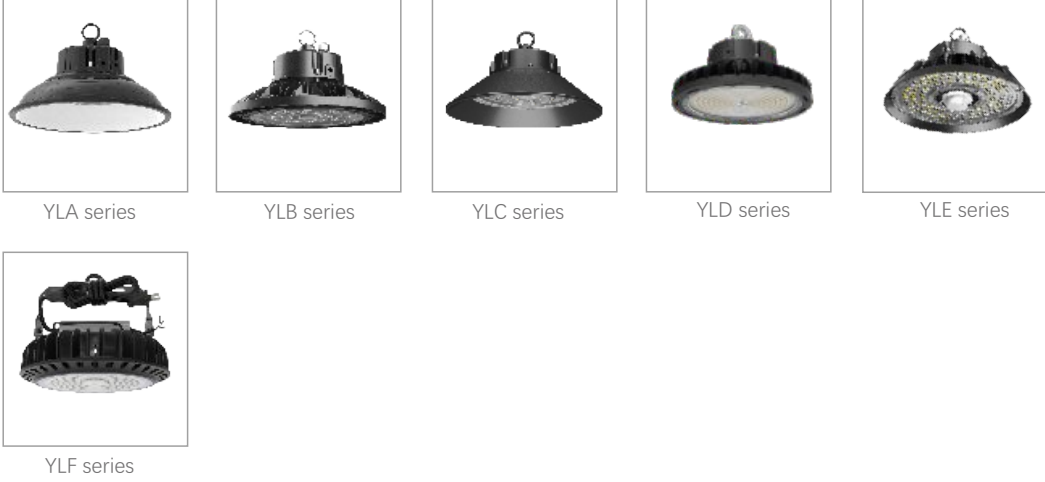

100W-175W for street lighting retrofit

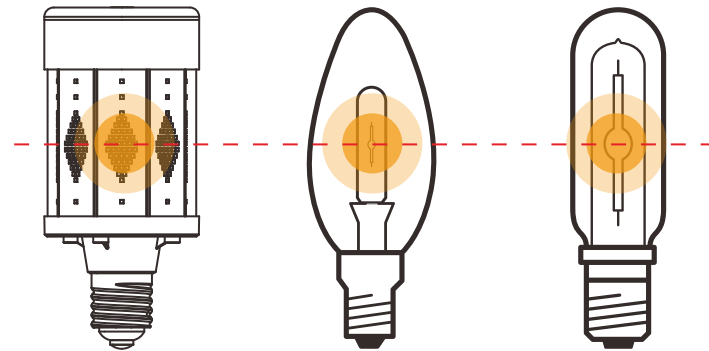

HID replacement

LED Bulb	HPL	SON	MHL
100W	400W	125-250W	125-250W
125W		250-400W	250-400W
150W		250-400W	250-400W
175W		250-400W	250-1000W

Lighting Distribution Curve same as traditional HID



Features

- > Small size and high lumen design for street light bulb replacement
- > LED light source: Lumileds 3030
- > Base: E39, Ex39, E40
- > Beam Angle: 360 degree
- > Driver is fulfilled with solid thermal grease
- > CCT: 2200K, 2700K, 3000K, 4000K, 5000K, 6000K
- > Lumen efficacy : 160lm/w
- > IP rate: IP54
- > 6KV surge protection
- > With SUNON cooling fan built-in
- > Used for enclosed lighting housing
- > 3-5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-WYX100W	100W	AC90-305V	160lm/w	16,000lm	Dia99*205mm	0.97kg
FL-WYX125W	125W	AC90-305V	160lm/w	20,000lm	Dia99*205mm	0.98kg
FL-WYX150W	150W	AC90-305V	160lm/w	24,000lm	Dia99*205mm	1.07kg
FL-WYX175W	170W	AC90-305V	160lm/w	28,000lm	Dia99*205mm	1.08kg



35W-80W for street lighting retrofit



HID replacement

LED Bulb	HPL	SON	MHL
35W135	80-125W	50-100W	
50W135	100-250W	70-150W	
80W135	125-250W	100-150W	175W
35W160	100-125W	70-100W	
50W160	125-250W	70-150W	
80W160	250-400W	150-250W	175W



Features

- > Small size and high lumen design for street light bulb replacement
- > LED light source: Lumileds 3030
- > Base: E26, E27, E39, Ex39, E40
- > Beam Angle: 360 degree
- > Driver is fulfilled with solid thermal grease
- > CCT: 2200K, 2700K, 3000K, 4000K, 5000K, 6000K
- > Lumen efficacy :135lm/w, 150lm/w, 160lm/w
- > IP rate: IP54
- > 6KV surge protection
- > With SUNON cooling fan built-in
- > Used for enclosed lighting housing
- > 3-5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-WYX35W135	35W	AC90-305V	135lm/w	4,725lm	Dia70*175mm	0.48kg
FL-WYX50W135	50W	AC90-305V	135lm/w	6,750lm	Dia70*195mm	0.52kg
FL-WYX80W135	80W	AC90-305V	135lm/w	10,800lm	Dia70*205mm	0.62kg
FL-WYX35W160	35W	AC90-305V	160lm/w	5,600lm	Dia70*175mm	0.48kg
FL-WYX50W160	50W	AC90-305V	160lm/w	8,000lm	Dia70*195mm	0.52kg
FL-WYX80W160	80W	AC90-305V	160lm/w	12,800lm	Dia70*205mm	0.62kg
FL-WYX35W160R	35W	AC90-305V	160lm/w	5,600lm	Dia70*175mm	0.48kg
FL-WYX50W160R	50W	AC90-305V	160lm/w	8,000lm	Dia70*195mm	0.52kg
FL-WYX80W160R	80W	AC90-305V	160lm/w	12,800lm	Dia70*205mm	0.62kg



12W-54W for garden HID retrofit



HID replacement

LED Bulb	CFL	HPL	HPS
12W	20W	30W	
16W	36W	50W	
20W	45W	70W	
24W	55W	80W	
27W		100W	70W
36W		150W	100W
45W		200W	125W
54W		250W	150W
30W		125W	70W
40W		175W	100W
50W		250W	150W

Features

- > Long life span and less brightness degradation
- > LED light source: SMD2835/3030
- > Base: E26, E27, E39, Ex39, E40
- > Beam Angle: 360 degree
- > Efficiency of driver is more than 90%
- > Driver is fulfilled with solid thermal grease
- > CCT: 2700K, 3000K, 4000K, 5000K, 6000K
- > Lumen efficacy :120LM/W
- > IP rate: IP65
- > Aluminum body for heat dissipation, no fans
- > 5 years warranty



Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-CL360D-12W	12W	AC90-277V	120lm/w	1,440lm	Dia64*155mm	0.3kg
FL-CL360D-16W	16W	AC90-277V	120lm/w	1,920lm	Dia64*165mm	0.33kg
FL-CL360D-20W	20W	AC90-277V	120lm/w	2,400lm	Dia64*185mm	0.35kg
FL-CL360D-24W	24W	AC90-277V	120lm/w	2,880lm	Dia64*205mm	0.42kg
FL-CL360D-27W	27W	AC90-277V	120lm/w	3,240lm	Dia93*204mm	0.72kg
FL-CL360D-36W	36W	AC90-277V	120lm/w	4,320lm	Dia93*234mm	0.84kg
FL-CL360D-45W	45W	AC90-277V	120lm/w	5,400lm	Dia93*265mm	0.92kg
FL-CL360D-54W	54W	AC90-277V	120lm/w	6,480lm	Dia93*275mm	1.0kg
FL-CL360D-30W	30W	AC90-277V	120lm/w	3,600lm	Dia88*258mm	0.65kg
FL-CL360D-40W	40W	AC90-277V	120lm/w	4,800lm	Dia88*258mm	0.68kg
FL-CL360D-50W	50W	AC90-277V	120lm/w	6,000lm	Dia88*258mm	0.7kg



25W/35W/45W/55W for horizontal installation



HID replacement

LED Bulb	HPL	HPS
25W	100W	70W
35W	150W	100W
45W	200W	125W
55W	250W	150W

Features:



Features

- > Long life span and less brightness degradation
- > LED light source: SMD5630
- > Base: E26, E27, E39, Ex39, E40
- > Beam Angle: 180 degree
- > Efficiency of driver is more than 90%
- > Driver is fulfilled with solid thermal grease
- > CCT: 2700K, 3000K, 4000K, 5000K, 6000K
- > Lumen efficacy :120LM/W
- > IP rate: IP65
- > Aluminum body for heat dissipation, no fans
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-CL180D-25W	25W	AC90-277V	120lm/w	3,000lm	Dia91.2*180mm	0.9kg
FL-CL180D-35W	35W	AC90-277V	120lm/w	4,200lm	Dia91.2*216mm	1.05kg
FL-CL180D-45W	45W	AC90-277V	120lm/w	5,400lm	Dia91.2*251mm	1.15kg
FL-CL180D-55W	55W	AC90-277V	120lm/w	6,600lm	Dia91.2*281mm	1.25kg



LED temporary work light



Features

- > Long life span and less brightness degradation
- > Dimmable 0 to 100% brightness
- > Beam Angle: 360 degree
- > CCT: 3000K, 4500K, 6000K changeable
- > Lumen efficacy :120LM/W
- > IP rate: IP65
- > 4 ways usage: Hook lifting, Hand-held, Flat placing, Tripod fixing
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-WL360D-50W	50W	AC90-277V	120lm/w	6,000lm	Dia127*277mm	1.5kg



S series 20-200W LED street light



3 color option



Accessories



Features

- > LED Light Source: Lumileds 3030/5050
- > Efficiency: 135lm/w, 150lm/w, 165lm/w option
- > Input volt: AC 100-240V, AC100-277V 50/60Hz
- > SOSEN / WEAN WELL driver option
- > IP/IK rating: IP66, IK08
- > Beam angle: Type II, Type III, Type IV
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Arm dia: 60mm(42/60mm for 20-60W)
- > Special design with built-in level instrument & rebreather
- > 5 years warranty

Datasheet


Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-SSL20W	20W	AC100-240V	140lm/w	2,800lm	491*190*82mm	3kg
FL-SSL30W	30W	AC100-240V	135lm/w	4,050lm	491*190*82mm	3kg
FL-SSL40W	40W	AC100-240V	135lm/w	5,400lm	491*190*82mm	3kg
FL-SSL50W	50W	AC100-240V	130lm/w	6,500lm	491*190*82mm	3kg
FL-SSL60W	60W	AC100-240V	130lm/w	7,800lm	491*190*82mm	3kg
FL-SSL80W	80W	AC100-240V	135lm/w	10,800lm	547*240*82mm	5kg
FL-SSL100W	100W	AC100-240V	135lm/w	13,500lm	547*240*82mm	5kg
FL-SSL120W	120W	AC100-240V	135lm/w	16,200lm	549*280*92mm	6.5kg
FL-SSL150W	150W	AC100-240V	135lm/w	20,250lm	549*280*92mm	6.5kg
FL-SSL180W	180W	AC100-240V	130lm/w	23,400lm	549*280*92mm	6.5kg
FL-SSL200W	200W	AC100-240V	125lm/w	26,000lm	549*280*92mm	6.5kg



M series 40-200W LED street light



Constitute

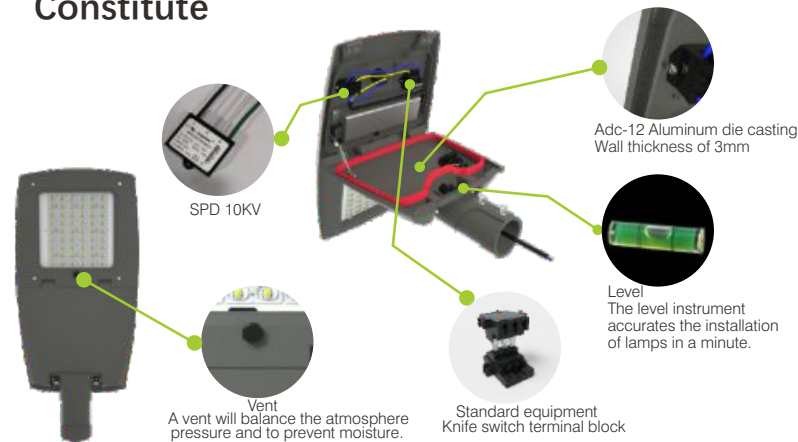

Features


- > LED Light Source: Lumileds 3030
- > Efficiency: 135lm/w
- > Input volt: AC 100-240V, AC100-277V 50/60Hz
- > SOSEN / WEAN WELL driver option
- > IP/IK rating: IP66, IK08
- > Beam angle: Type II, Type III, Type V
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Arm dia: 60/76mm
- > Special design with built-in level instrument & rebreather
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-MSL40W	40W	AC100-240V	145lm/w	5,800lm	438*182*133mm	4.2kg
FL-MSL60W	60W	AC100-240V	135lm/w	8,100lm	438*182*133mm	4.2kg
FL-MSL80W	80W	AC100-240V	135lm/w	10,800lm	474*259*95mm	6.6kg
FL-MSL100W	100W	AC100-240V	130lm/w	13,000lm	474*259*95mm	6.6kg
FL-MSL120W	120W	AC100-240V	140lm/w	16,800lm	560*304*100mm	8.5kg
FL-MSL150W	150W	AC100-240V	130lm/w	22,500lm	560*304*100mm	8.5kg
FL-MSL180W	180W	AC100-240V	140lm/w	25,200lm	609*330*110mm	9.5kg
FL-MSL200W	200W	AC100-240V	135lm/w	27,000lm	609*330*110mm	9.5kg



A series 30-120W LED street light

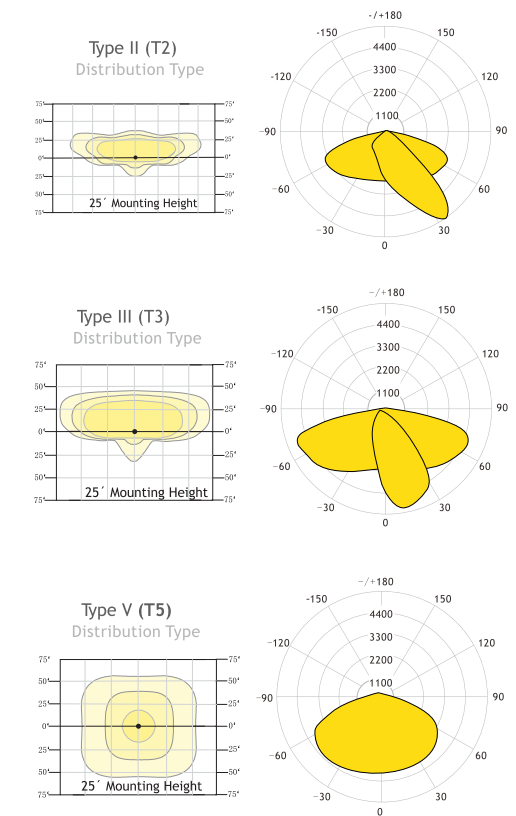

Accessories



Features

- > LED Light Source: Lumileds 3030
- > Efficiency: 135lm/w
- > Input volt: AC 100-240V, AC100-277V 50/60Hz
- > SOSEN / WEAN WELL driver option
- > IP/IK rating: IP66, IK08
- > Beam angle: Type II, Type III, Type V
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Arm dia: 60mm
- > Special design with built-in level instrument
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-ASL30W	30W	AC100-240V	120lm/w	3,600lm	485*240*84mm	4.3kg
FL-ASL50W	50W	AC100-240V	120lm/w	6,000lm	485*240*84mm	4.3kg
FL-ASL70W	70W	AC100-240V	120lm/w	8,400lm	485*240*84mm	4.3kg
FL-ASL80W	80W	AC100-240V	120lm/w	9,600lm	546*280*90mm	5.8kg
FL-ASL100W	100W	AC100-240V	120lm/w	12,000lm	546*280*90mm	5.8kg
FL-ASL120W	120W	AC100-240V	120lm/w	14,400lm	546*280*90mm	5.8kg



S series 10-400W LED flood light



Features

- > LED Light Source: Lumileds 3030/5050
- > Efficiency: 120lm/w, 150lm/w, 170lm/w
- > Input volt: AC100-277V 50/60Hz
- > IP/IK rating: IP65, IK08
- > Beam angle: 8/15/30/60/90/120 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-SFL10W	10W	AC100-277V	100lm/w	1,000lm	165*116*33mm	0.48kg
FL-SFL20W	20W	AC100-277V	100lm/w	2,000lm	215*152*40mm	0.85kg
FL-SFL30W	30W	AC100-277V	100lm/w	3,000lm	226*152*40mm	1.17kg
FL-SFL50W	50W	AC100-277V	100lm/w	5,000lm	309*220*50mm	1.89kg
FL-SFL80W	80W	AC100-277V	120lm/w	9,600lm	353*243*55mm	4.7kg
FL-SFL100W	100W	AC100-277V	120lm/w	12,000lm	401*294*61mm	5.5kg
FL-SFL150W	150W	AC100-277V	120lm/w	18,000lm	429*330*61mm	6.9kg
FL-SFL200W	200W	AC100-277V	120lm/w	24,000lm	469*360*61mm	8.2kg
FL-SFL300W	300W	AC100-277V	130lm/w	39,000lm	564*457*65mm	10kg
FL-SFL400W	400W	AC100-277V	130lm/w	52,000lm	584*559*70mm	18kg



X series 10-200W LED flood light



PIR Sensor



Lens:
15°/25°/45°/60°/90°

Features



- > LED Light Source: OSRAM 2835
- > Efficiency: 130lm/w
- > Input volt: AC85-265V 50/60Hz
- > IP/IK rating: IP66, IK08
- > Beam angle: 15/25/45/60/90/120 degree
- > CCT: 3000K, 4000K, 5000K, 6000K, RGB color
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-XFL10W	10W	AC85-265V	110lm/w	1,000lm	129*99*44mm	0.6kg
FL-XFL20W	20W	AC85-265V	110lm/w	2,200lm	175*135*44mm	0.95kg
FL-XFL30W	30W	AC85-265V	120lm/w	3,600lm	215*175*47mm	1.4kg
FL-XFL50W	50W	AC85-265V	120lm/w	6,000lm	275*225*48mm	2.3kg
FL-XFL100W	100W	AC85-265V	120lm/w	12,000lm	325*275*53mm	3.8kg
FL-XFL150W	150W	AC85-265V	120lm/w	18,000lm	385*305*58mm	5kg
FL-XFL200W	200W	AC85-265V	120lm/w	24,000lm	435*335*65mm	6.4kg



HM series 100-1440W LED high mast light

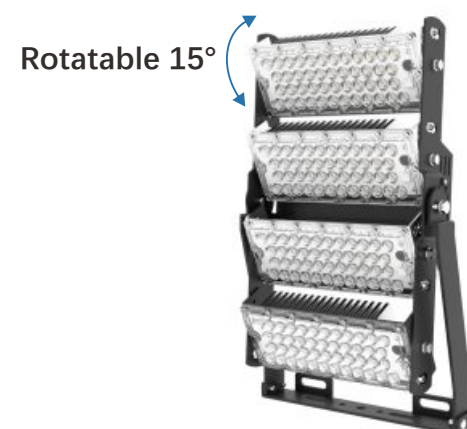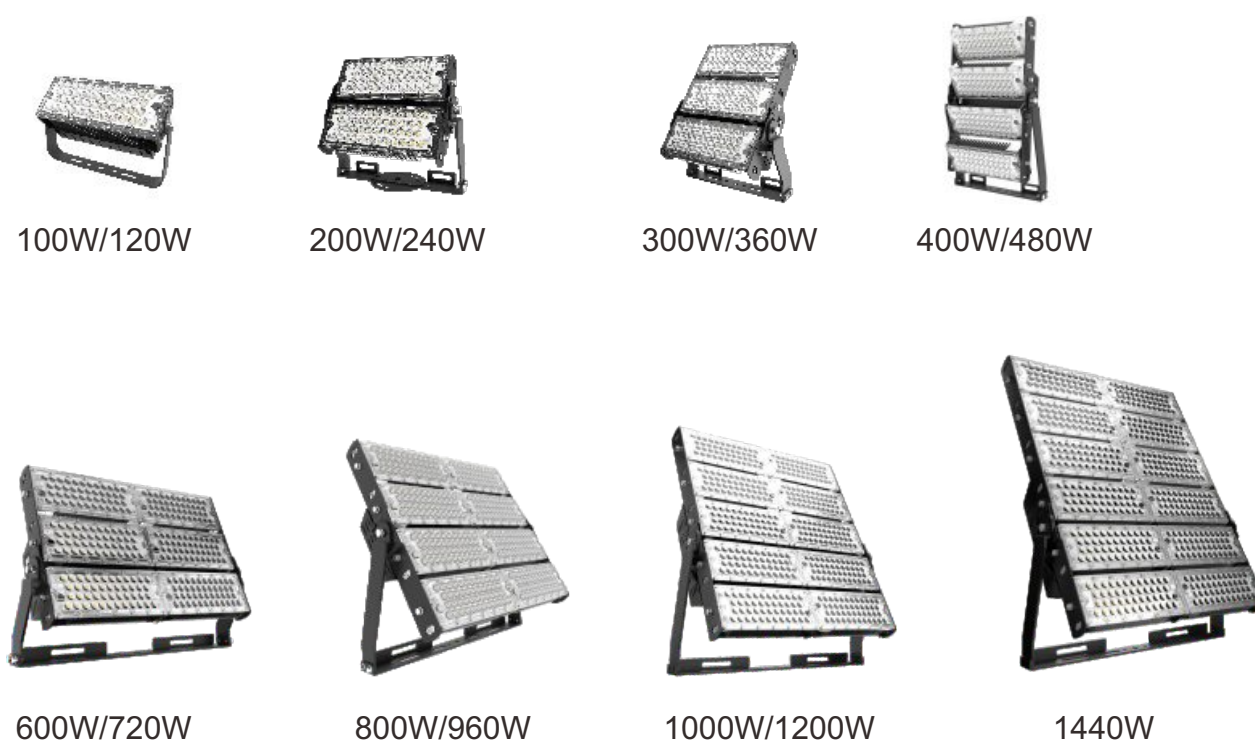

Features


- > LED Light Source: Lumileds 3030/5050
- > Efficiency: 130lm/w, 160lm/w
- > Input volt: AC100-277V 50/60Hz
- > IP/IK rating: IP65, IK10
- > Beam angle: 20/40/60/90/120/140*100 degree
- > Each module rotatable up & down 15°
- > CCT: 3000K, 4000K, 5000K, 6000K
- > 5 years warranty

Datasheet


Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-HM120W	120W	AC100-277V	160lm/w	19,200lm	297*362*132mm	2.7kg
FL-HM240W	240W	AC100-277V	160lm/w	38,400lm	342*362*132mm	6kg
FL-HM300W	300W	AC100-277V	160lm/w	48,000lm	475*362*132mm	8kg
FL-HM480W	480W	AC100-277V	160lm/w	76,800lm	597*362*132mm	10kg
FL-HM720W	720W	AC100-277V	160lm/w	115,600lm	649*375*132mm	13.2kg
FL-HM960W	960W	AC100-277V	160lm/w	153,600lm	597*650*132mm	18kg
FL-HM1200W	1200W	AC100-277V	160lm/w	192,000lm	729*650*132mm	21.5kg
FL-HM1440W	1440W	AC100-277V	160lm/w	230,400lm	860*650*132mm	25kg



THM series 720-1440W LED high mast light

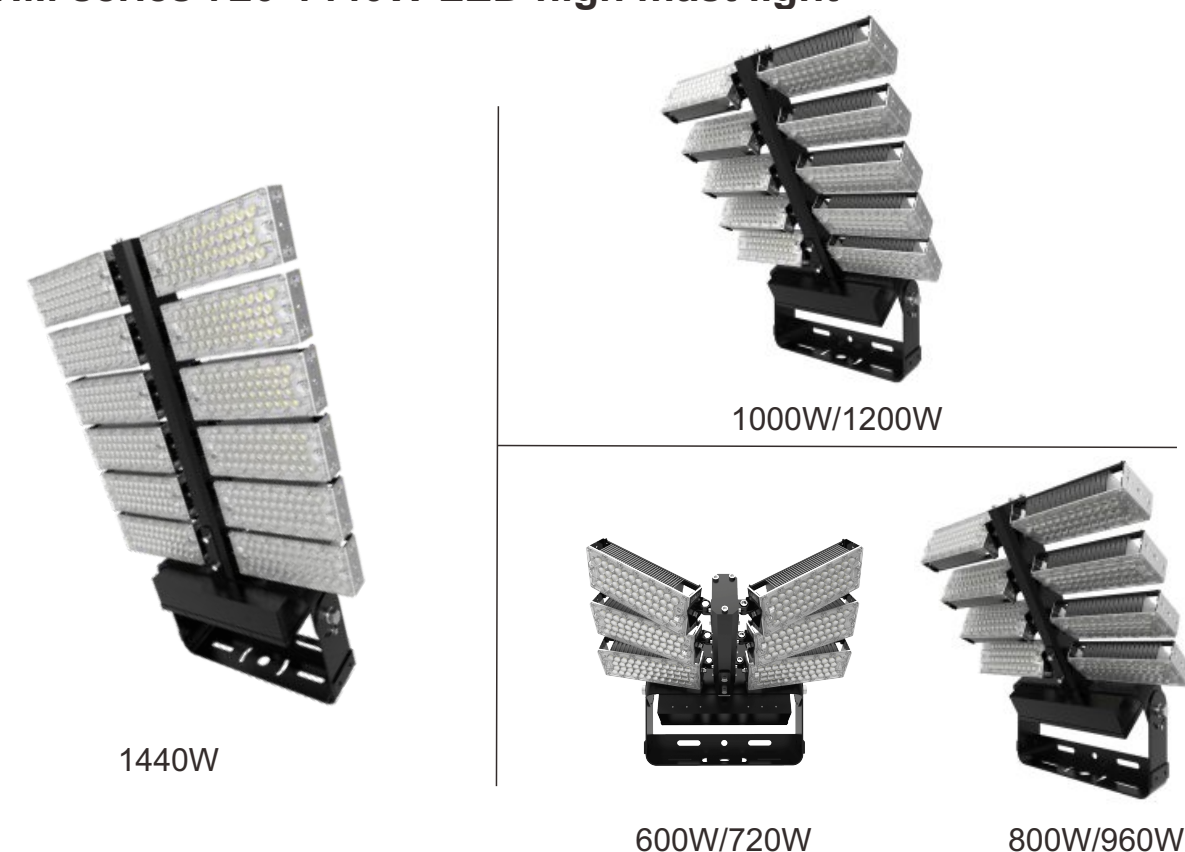

1440W

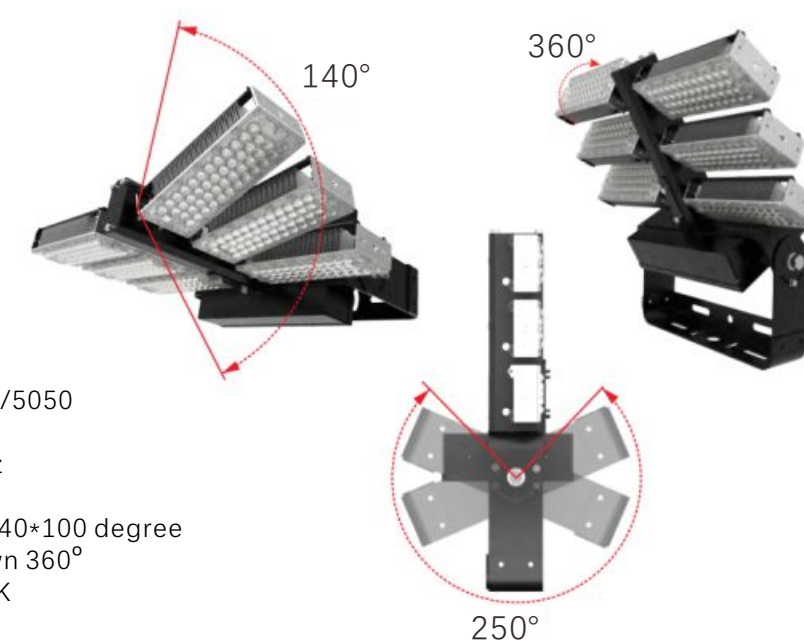

Features



- > LED Light Source: Lumileds 3030/5050
- > Efficiency: 130lm/w, 160lm/w
- > Input volt: AC100-277V 50/60Hz
- > IP/IK rating: IP65, IK10
- > Beam angle: 20/40/60/90/120/140*100 degree
- > Each module rotatable up & down 360°
- > CCT: 3000K, 4000K, 5000K, 6000K
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-THM720W	720W	AC100-277V	160lm/w	11,600lm	649*474*268mm	23kg
FL-THM960W	960W	AC100-277V	160lm/w	148,800lm	855*694*268mm	27kg
FL-THM1200W	1200W	AC100-277V	160lm/w	186,000lm	987*694*268mm	31.5kg
FL-THM1440W	1440W	AC100-277V	160lm/w	230,400lm	1119*694*268mm	37kg



DHM series 300-1800W LED high mast light

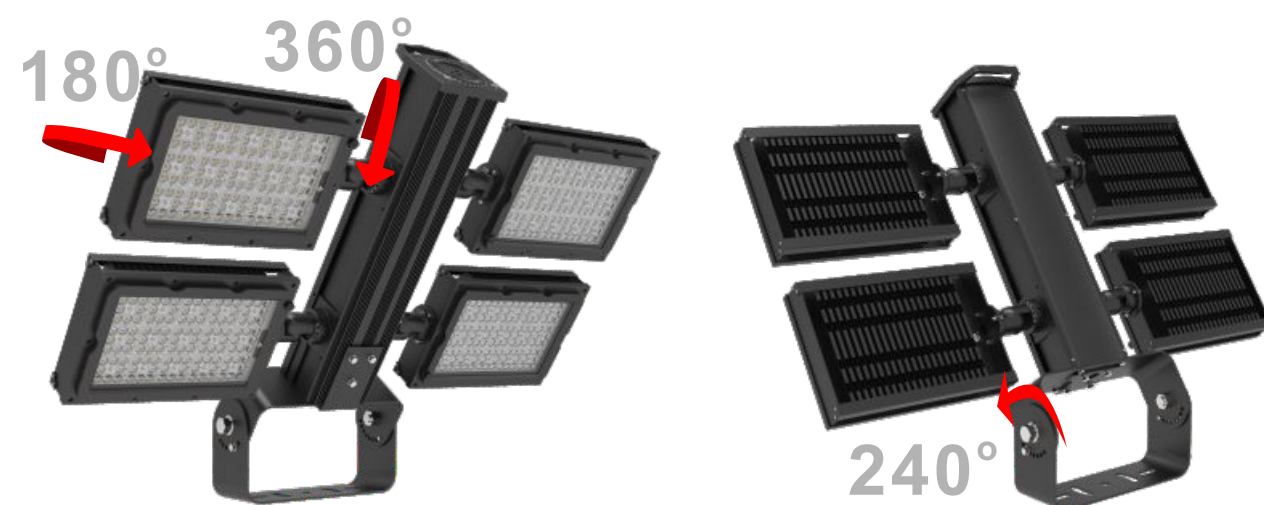

Features

- > LED Light Source: Lumileds 5050
- > Efficiency: 155lm/w, 165lm/w, 180lm/w
- > Input volt: AC100-277V 50/60Hz
- > IP/IK rating: IP66, IK08
- > Wind rating: 51-56m/s
- > Beam angle: 10/20/40/60/90/135*60/97*47 degree
- > Each module rotatable up & down 360°
- > CCT: 3000K, 4000K, 5000K, 6000K
- > 5 years warranty



Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-DHM300W	300W	AC100-277V	160lm/w	46,500lm	518*269*137mm	6.6kg
FL-DHM600W	600W	AC100-277V	160lm/w	93,000lm	744*847*172mm	18kg
FL-DHM900W	900W	AC100-277V	160lm/w	139,500lm	910*1125*181mm	24kg
FL-DHM1200W	1200W	AC100-277V	160lm/w	186,000lm	1125*911*181mm	32kg
FL-DHM1800W	1800W	AC100-277V	160lm/w	279,000lm	1125*1191*181mm	42kg

DHM series 240/300W LED high mast light SKD



X1

+



Bracket

=



240W/300W



X2

+



Bracket

=



480W/600W



X3

+



Bracket

=



720W/900W



X4

+



Bracket

=



960W/1200W

Features

- > LED Light Source: Lumileds 5050
- > Efficiency: 155lm/w, 165lm/w, 180lm/w
- > Input volt: AC100-277V or AC347-480V
- > IP/IK rating: IP66, IK08
- > Win rating: 51-56m/s
- > Beam angle: 10/20/40/60/90/135*60/97*47 degree
- > Module rotatable up & down 360°
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Driver and module come with female/male connectors
- > 5 years warranty



Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-DHM240WSKD	240W	AC100-277V	165lm/w	39,600lm	518*269*137mm	6.2kg
FL-DHM300WSKD	300W	AC100-277V	155lm/w	46,500lm	518*269*137mm	6.6kg

YLA series 100W/150/200 UFO highbay light



● PC Lens, beam angle 60/90/110 degree



100W



150W



200W

Features

- > LED Light Source: OSRAM 2835
- > Efficiency: 150lm/w, 170lm/w
- > Input volt: AC100-277V
- > IP/IK rating: IP66, IK10
- > Beam angle: 60/90/110 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Steel matel housing with anti-glare design
- > Design for dusty plant, dust-proof design easy to clean
- > Mounting height: 6-20meter
- > 5 years warranty



Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLA100W	100W	AC100-277V	150lm/w	15,000lm	Dia294*179mm	2.3kg
FL-UFOYLA150W	150W	AC100-277V	150lm/w	22,500lm	Dia340*185mm	3.5kg
FL-UFOYLA200W	200W	AC100-277V	150lm/w	30,000lm	Dia364*191mm	4.8kg

YLB series 100W/150/200/240W UFO highbay light



● PC Lens, beam angle 60/90/110 degree



100W



150W



200W / 240W

Features

- > LED Light Source: OSRAM 2835
- > Efficiency: 150lm/w, 170lm/w
- > Input volt: AC100-277V
- > IP/IK rating: IP65, IK10
- > Beam angle: 60/90/110 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Die-cast aluminum housing design, better for heat dissipation, long lifespan
- > Mounting height: 6-20meter
- > 5 years warranty



Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLB100W	100W	AC100-277V	150lm/w	15,000lm	Dia270*165mm	3kg
FL-UFOYLB150W	150W	AC100-277V	150lm/w	22,500lm	Dia315*168mm	3.8kg
FL-UFOYLB200W	200W	AC100-277V	150lm/w	30,000lm	Dia380*176mm	5kg
FL-UFOYLB240W	240W	AC100-277V	150lm/w	36,000lm	Dia380*176mm	5kg

YLC series 100W/150/200 UFO highbay light



● PC Lens, beam angle 60/90/110 degree



Features

- > LED Light Source: OSRAM 2835
- > Efficiency: 150lm/w, 170lm/w
- > Input volt: AC100-277V
- > IP/IK rating: IP66, IK10
- > Beam angle: 60/90/110 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Design for dusty plant, dust-proof design easy to clean
- > Mounting height: 6-20meter
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLC100W	100W	AC100-277V	150lm/w	15,000lm	Dia280*155mm	2.5kg
FL-UFOYLC150W	150W	AC100-277V	150lm/w	22,500lm	Dia300*172mm	3.5kg
FL-UFOYLC200W	200W	AC100-277V	150lm/w	30,000lm	Dia320*192mm	4.5kg



YLD series 100W/150/200/240W UFO highbay light



● PC Lens, beam angle 90/120 degree



Features

- > LED Light Source: OSRAM 2835
- > Efficiency: 160lm/w, 200lm/w
- > Input volt: AC85-265V
- > IP/IK rating: IP65, IK10
- > Beam angle: 90/120 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Folding aluminum fin design, very light weight save shipping cost
- > Mounting height: 6-20meter
- > 5 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLD100W	100W	AC100-277V	160lm/w	16,000lm	Dia234*145mm	2.2kg
FL-UFOYLD150W	150W	AC100-277V	160lm/w	24,000lm	Dia234*145mm	2.2kg
FL-UFOYLD200W	200W	AC100-277V	160lm/w	32,000lm	Dia277*145mm	2.7kg
FL-UFOYLD240W	240W	AC100-277V	160lm/w	38,400lm	Dia325*132mm	3.5kg



YLE series 100W/150/200/240W UFO highbay light



Features

- > LED Light Source: OSRAM 2835
- > Efficiency: 150lm/w, 170lm/w
- > Input volt: AC100-277V
- > IP/IK rating: IP66, IK10
- > Beam angle: 60/90/110 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > Die-cast aluminum housing with elegant appearance
- > Mounting height: 5-15meter
- > Microwave sensor option
- > 5 years warranty



Microwave sensor



Remote control

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLE100W	100W	AC100-277V	150lm/w	15,000lm	Dia267*163mm	2.7kg
FL-UFOYLE150W	150W	AC100-277V	150lm/w	22,500lm	Dia294*174mm	3.5kg
FL-UFOYLE200W	200W	AC100-277V	150lm/w	30,000lm	Dia320*188mm	4.2kg
FL-UFOYLE240W	240W	AC100-277V	150lm/w	36,000lm	Dia320*188mm	4.2kg



YLF series 100W/150/200W UFO highbay light



Features

- > LED Light Source: Lumileds 3030
- > Efficiency: 150lm/w, 170lm/w
- > Input volt: AC100-277V
- > With dimmer and plug, end user best choice
- > IP/IK rating: IP65, IK10
- > Beam angle: 60/90/120 degree
- > CCT: 3000K, 4000K, 5000K, 6000K
- > High quality with IP67 INVENTRONICS LED driver
- > Mounting height: 6-20meter
- > 7 years warranty

Datasheet

Model	Watt	Input Volt	Efficiency	Lumen	Dimension	G.W
FL-UFOYLF100W	100W	AC100-277V	150lm/w	15,000lm	Dia200*150mm	3.6kg
FL-UFOYLF150W	150W	AC100-277V	150lm/w	22,500lm	Dia255*150mm	5.1kg
FL-UFOYLF200W	200W	AC100-277V	150lm/w	30,000lm	Dia320*150mm	6.1kg

