

CATALOG

SHENZHEN FOCUS LIGHTING CO., LTD

PRODUCTS FOR
HOTEL & ATR GALLERY & STORE LIGHTING



Shenzhen Focus Lighting Co., Ltd.

Add: 601, No. 10, Huanguan South Road, Junzibu Community, Guanlan Street
Longhua District, Shenzhen City, Guangdong, China

Email: info@fi-sz.com

Tel: 0086-15219502021

Web: www.fi-sz.com

2021



Company Profile

Shenzhen Focus Lighting Co., Limited was founded in 2010, it's a professional manufacturer which specialized in research and developing, producing and exporting led lighting products.

Products are get CE ROHS TUV SAA ETL Certification. Mainly produce industrial and commercial lighting and export to Europe, USA, Canada, Australian, and other high-end market. Factory totally 2200 square meters, with a professional team of over 50 personnel. We insist honest, professional high quality and excellent service.

Factory Tour:



Certification:



CONTENTS

Zoomable LED track light

1-4



Museum



Leica A



Leica B



Switch

LED track light

5-10



Family



Master



Rubik



Elegant



Strong



Wind

Track rail

11-12



3 wires track rail



4 wires track rail



6 wires track rail

Anti-Glare LED Downlight

13-14



Less pin-hole



Less



Less frameless



Less square



Less square frameless



Deep



Deep frameless



Less basic



Less square basic



Deep basic

Recessed LED Downlight

15-21



Wall-washer series



Jupiter series



Vortex



Vortex Square



Star



Star square



Star twins



Bike



Bike twins



Bike triplets



Elephant A



Elephant B



Piston

LED Downlight accessories For US & Canada

22



hanger bars(plate)



Junction box

Surface Mounted light and pendant light

23-24



Master B round



Master B square



Master B pendant



Master B pendant



Master B Twins



Master C round



Master C square



Master C pendant



Master C pendant

PAR20/PAR30/PAR38

25-26



Gem Par20



Gem Par30



Diamond Par30



Diamond Par38

PAR30/PAR38 track light holder

27-28



Tri-proof light

29-30



Plastic Tri-proof



Tool free Tri-proof

Batten light

31-32



Slim T8 batten



Arched batten

Panel light

33-34



Slim panel light



Backlit panel light

Museum




3 wires(H-type)



4 wires




6 wires Dali




Brand chips



Product code:	P7018G-GTC-020/030
Total power:	20/30W 80LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT CCT change & dim to warm solution available
Beam angle:	Optics shape options:form small to big ,round round,square,triangle or other special shapes you want to build
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires(H-type),4 wires, 6wires Dali.

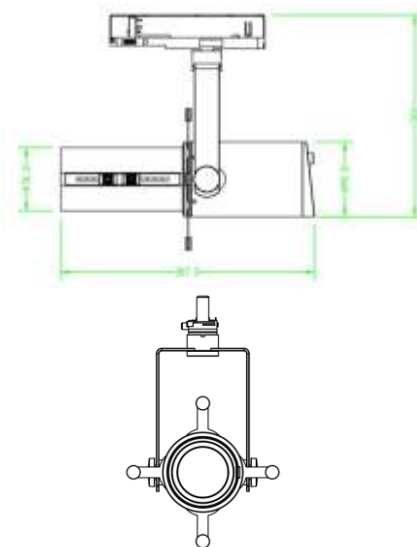


Leica A Zoomable

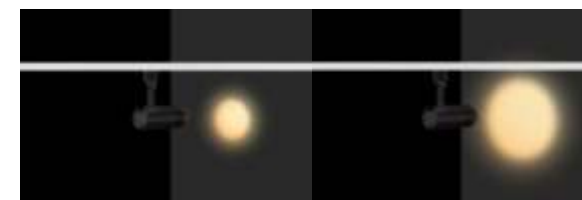


Brand chips




Product code:	P6114G-A015W/020W
Total power:	15/20W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT CCT change & dim to warm solution available
Beam angle:	adjustable from 12° to 60°
Function:	On - off/Triac/Local dim
Track system compatible:	2wires, 3wires(Halo, Juno, Lightolier) 4wires

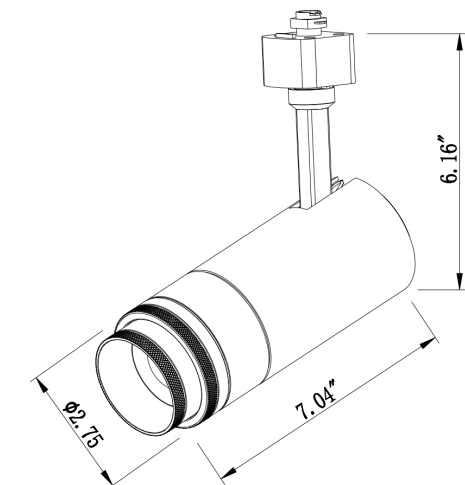

Leica B Zoom

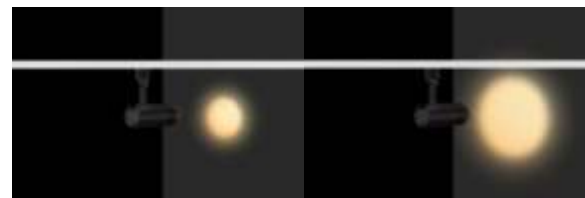


Product code:	P7017G-GTC-020/030
Total power:	20/30W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
	CCT change & dim to warm solution available
Beam angle:	adjustable from 12° to 60°
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires(H-type),4 wires,6wires Dali.

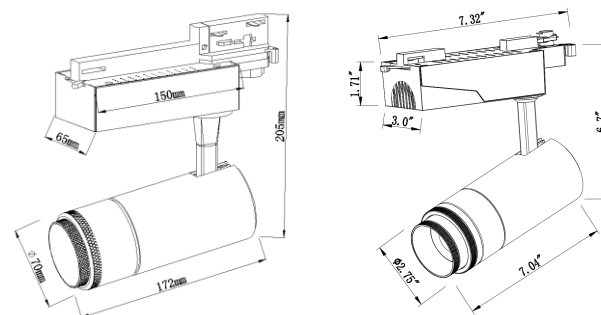


Switch


(Tips:Rubik, Strong,Elegant series have same solution)

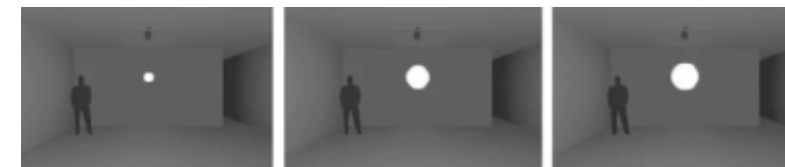

Product code:	P7017G-G003Y-030
Total power:	30W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Beam angle adjustable:	Option A:10°-24°-30°,Option B:24°-45°-60°; Option C: 60°-80°-100°;Option D:120°-130°-140°
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires(H-type),4 wires,6wires Dali.

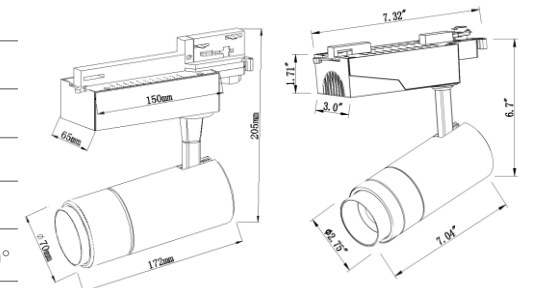

Family

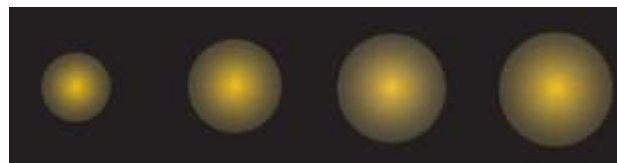

Production NO.:	P1560G-G015Y-015/020/030
Total power:	15/20/30W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Beam angle:	15°/24°/36°/60°
Function:	On - off/Triac/Local dim
Wires:	3 wires or 4 wires
Surface mounted available	



Master A

Track head mounted




Surface monted




Pendant, cable standard length(60cm or 2ft)



H/J/L-type:	T8011T-D020W
3/4 wires:	P1374G-G002Y-020
Total power:	20W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Function:	On - off/Triac/Local dim
Wires:	3 wires or 4 wires
Track system compatible:	Halo,Juno or Lightolier

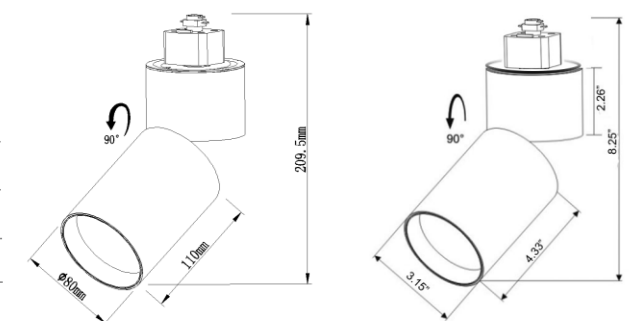


Rubik

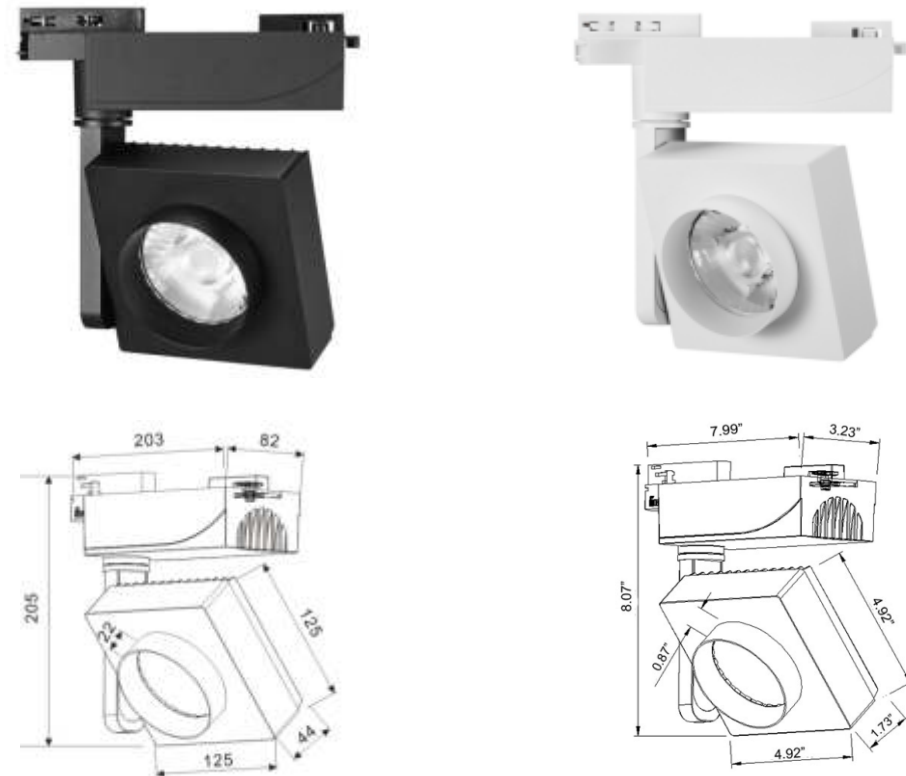

H/L-type:	P2082G-G035W
3/4/6 wires:	P1015G-G005Y-035
Total power:	35W 90LM / W CRI: > 90 or > 95
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
Standard fixed beam angle solution:	24D,36D,60D,80D or 120D
Beam angle adjustable solution:	A:10°-24°-30° B:24°-45°-60°; C: 60°-80°-100° D:120°-130°-140°
Rectangle optics beam angle solution:	4x8D/8x16D/12x24D
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires 4 wires 6 wires
Track system compatible:	Halo or Lightolier



Elegant

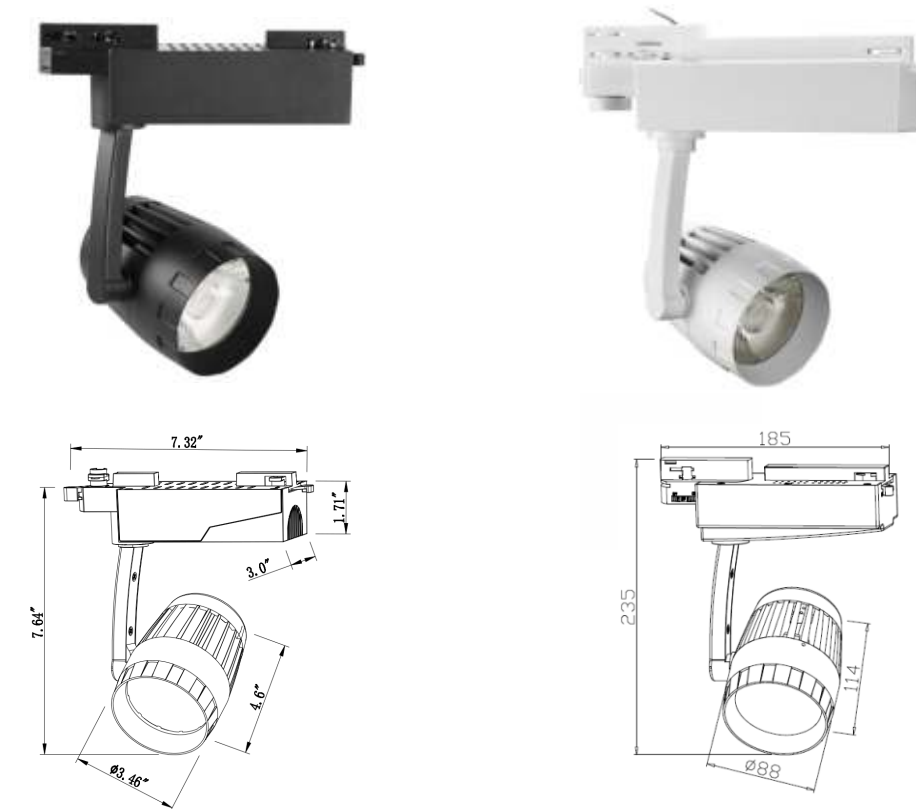

H/L-type:	P8811G-G032W
3/4/6 wires:	P8811G-G001Y-032
LED quantity:	1pcs LED
Total power:	32W 90LM / W CRI: > 90 or > 95
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
Standard fixed beam angle solution:	15D,24D,36D, or 60D
Beam angle adjustable solution:	A:10°-24°-30° B:24°-45°-60°; C: 60°-80°-100° D:120°-130°-140°
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires 4 wires 6 wires
Track system compatible:	Halo or Lightolier



Strong



Brand chips



H/L-type:	P9513G-G035W/040W/050W
3/4/6 wires:	P9513G-G010Y-035/040/050
LED quantity:	1pcs LED
Total power:	30/40/50W 90LM / W CRI: > 90 or > 95
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
Standard xed beam angle solution:	15D,24D,36D, or 60D
Beam angle adjustable solution:	A:10°-24°-30° B:24°-45°-60°; C: 60°-80°-100° D:120°-130°-140°
Function:	On - off/Triac/0-10V/Local dim/Dali
Wires:	3 wires 4 wires 6 wires
Track system compatible:	Halo or Lightolier




Wind




Brand chips



Product code:	P7012G-G020W/030W
Total power:	20/30W 90LM / W CRI: > 90 or > 95
LED quantity:	1pcs LED
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Beam angle:	15°/24°/36°/60°
Function:	On - off/Triac/Local dim
Track system compatible:	Halo, Juno, or Lightolier

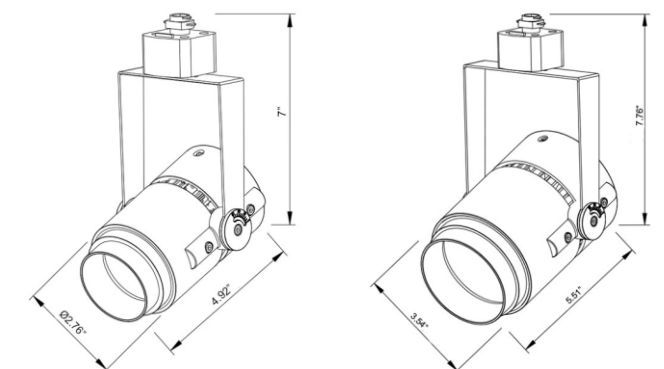

3 wires track rail




3 wires length: 1000mm, 1500mm, 2000mm, 3000mm.

H-type length: 2ft, 4ft, 6ft, 8ft


Installation way, surface mounted/pendant.

We have special recessed type.

4 wires track system



6 wires Dali



3 wires length: 1000mm, 1500mm, 2000mm, 3000mm.


Installation way, surface mounted/pendant.

We have special recessed type.


We have 6 wires Dali track rail too.




Less Series UGR<13(Adjustable type)

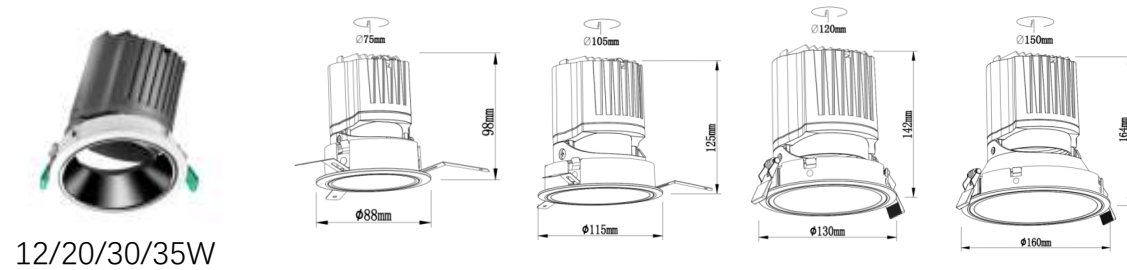


12/20/30/35W

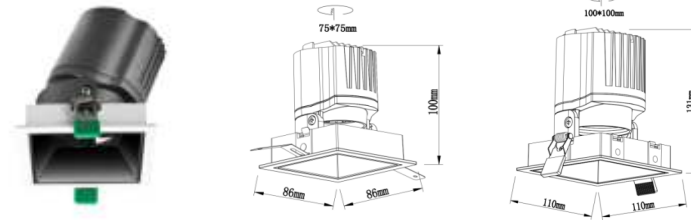


12/20W

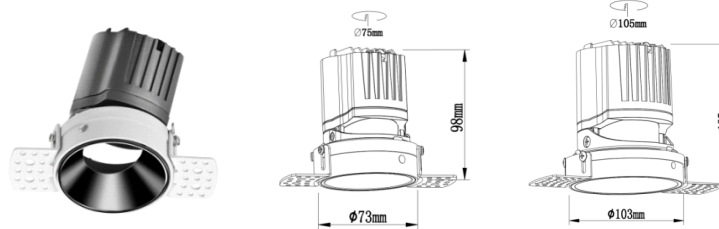

12/20W

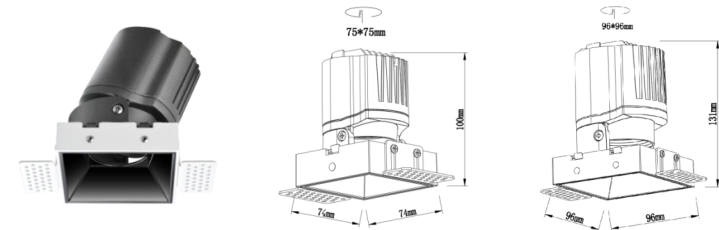

12/20W



Product code: T8816TDA01-12W

T8816TDA02-20W

T8816TDA03-30W

T8816TDA04-35W

T8816TDC01-12W

T8816TDC02-20W

T8816TGA01-12W

T8816TGA02-20W

T8816TGC01-12W

T8816TGC02-20W

Less series LED downlight, Darklight technology.

UGR<13, Ra>90 or Ra>95, 100-277V AC input

LEDs brand: Citizen,Luminus,Osram,Philips

Input voltage: AC100-277V/50-60Hz

15D/24D/36D/60D beam angle

Round/Pin-hole/Oval-hole/Square

Round/Square Frameless

Reflector color options: Black/Silver/Golden

CCT: 2700/3000/4000/6000K, or customized CCT.


Dim to warm solution available.

Brand chips


CREE OSRAM bridgelux LUMILEDS



Deep Series UGR<10(fixed type)

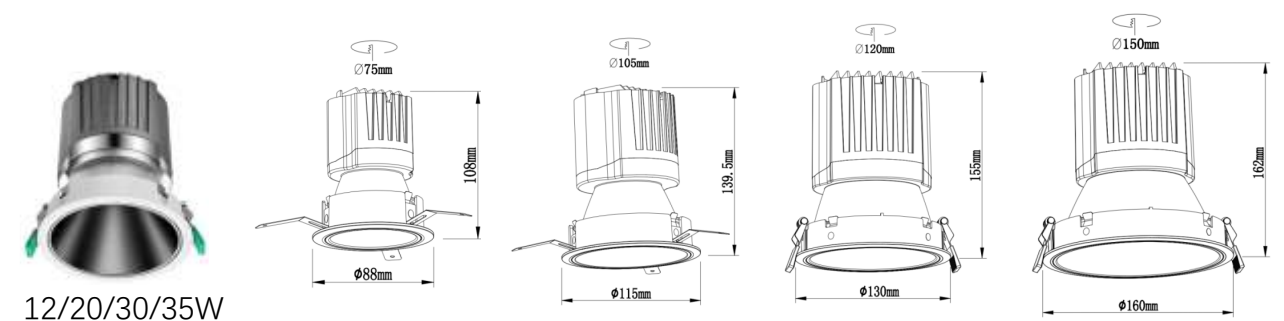


12/20/30/35W

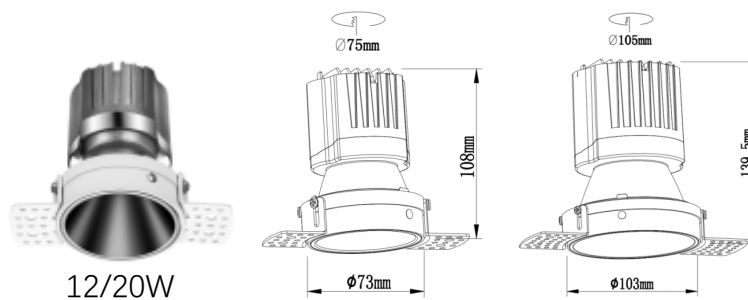

12/20W



Black Silver Golden

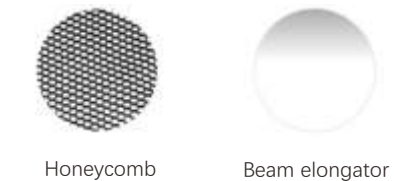

Honeycomb Beam elongator



Product code: T8816TDC01-12W

T8816TDB02-20W

T8816TDB03-30W

T8816TDB03-35W

T8816TDD01-12W

T8816TDD02-20W

Brand chips

CREE OSRAM bridgelux LUMILEDS



Deep series LED downlight, Darklight technology.

UGR<10, Ra>90 or Ra>95, 100-277V AC input

LEDs brand: Citizen,Luminus,Osram,Philips

Input voltage: AC100-277V/50-60Hz

15D/24D/36D beam angle


Round/Round frameless

Reflector color options: Black/Silver/Golden

CCT: 2700/3000/4000/6000K, or customized CCT.

Dim to warm solution available.

Wall Wash (fixed type)


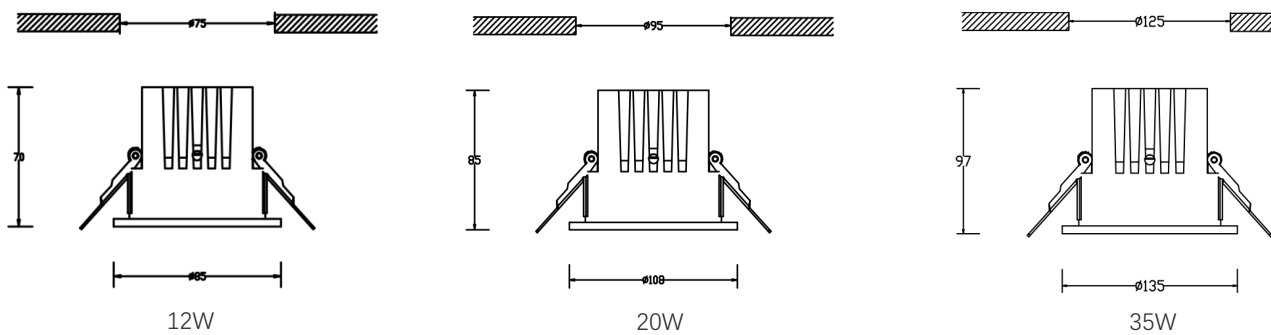


Brand chips



Product code:	T9570TD008-12W/20W/35W
Total power:	12/20/35W 90LM / W CRI: > 90 or > 95
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
Beam angle:	10x50D
Function:	On - off/Triac/0-10V/Dali

Jupiter(fixed type)

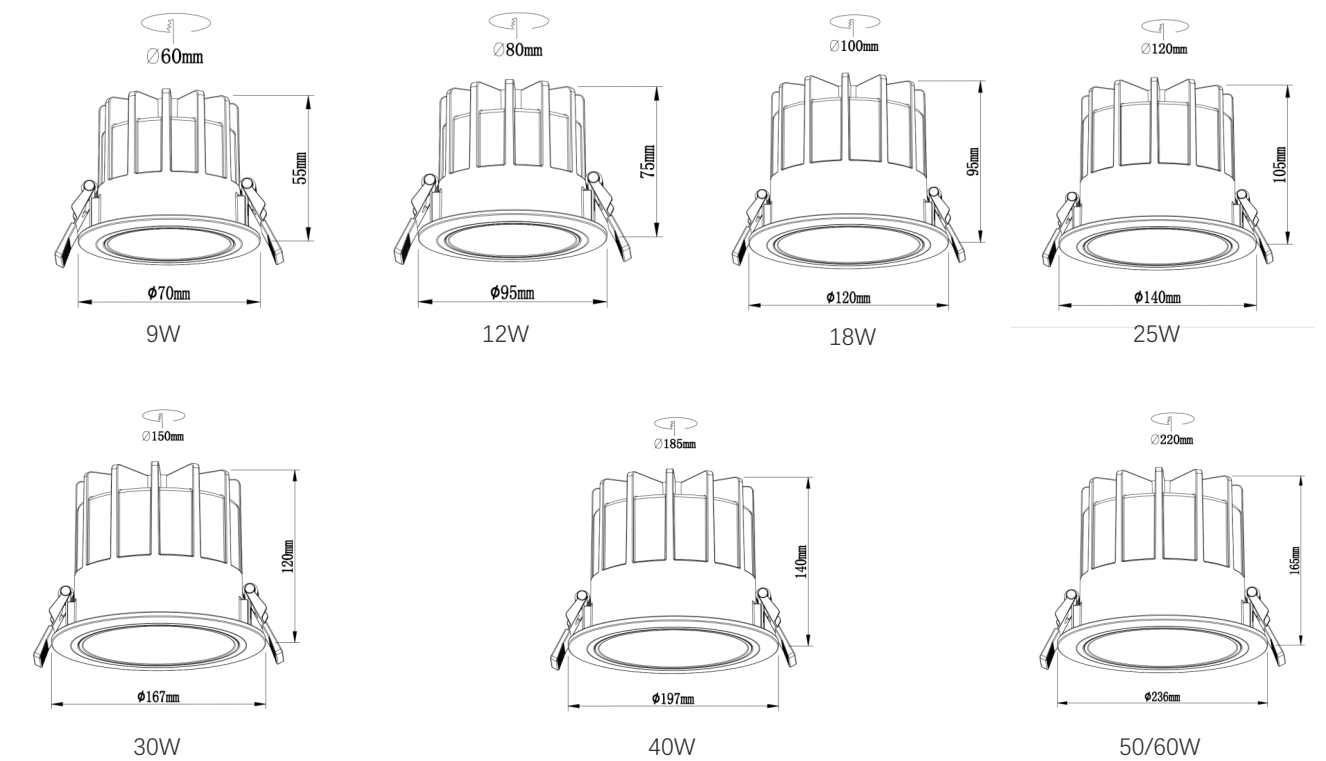


Product code:	T9570TD008-9/12/18/25/30/40/50/60W
Total power:	9/12/18/25/30/40/50/60W
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
Beam angle:	15/30/45D 90LM / W CRI: > 90 or > 95
Function:	On - off/Triac/0-10V/Dali
Housing color:	white/black;Re ector color:white/black/silver

Brand chips



Vortex(fixed type)

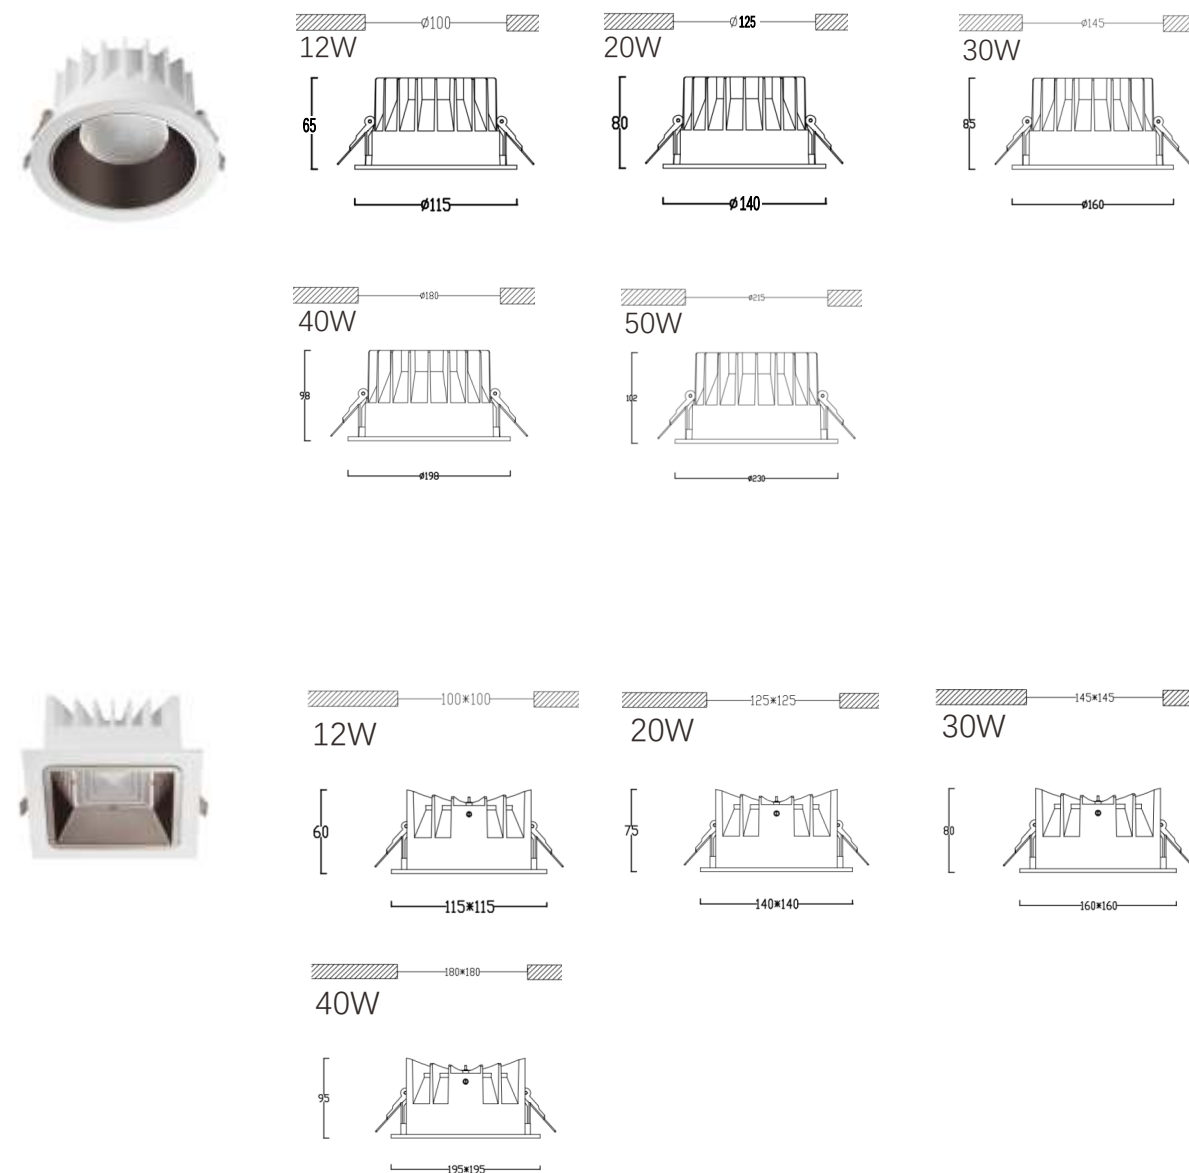

Product code T9570TD010-10W/12W/20W/30W/40W

Total power: 10/12/20/30/40W

LEDs brand: Citizen,Luminus,Osram,Philips

Input voltage: AC100-277V/50-60Hz

Beam angle: 50D 90LM / W CRI: > 90 or > 95



Function: On - off/Triac/0-10V/Dali

Round/Square

Brand chips



Star and star twins (swiveling type)

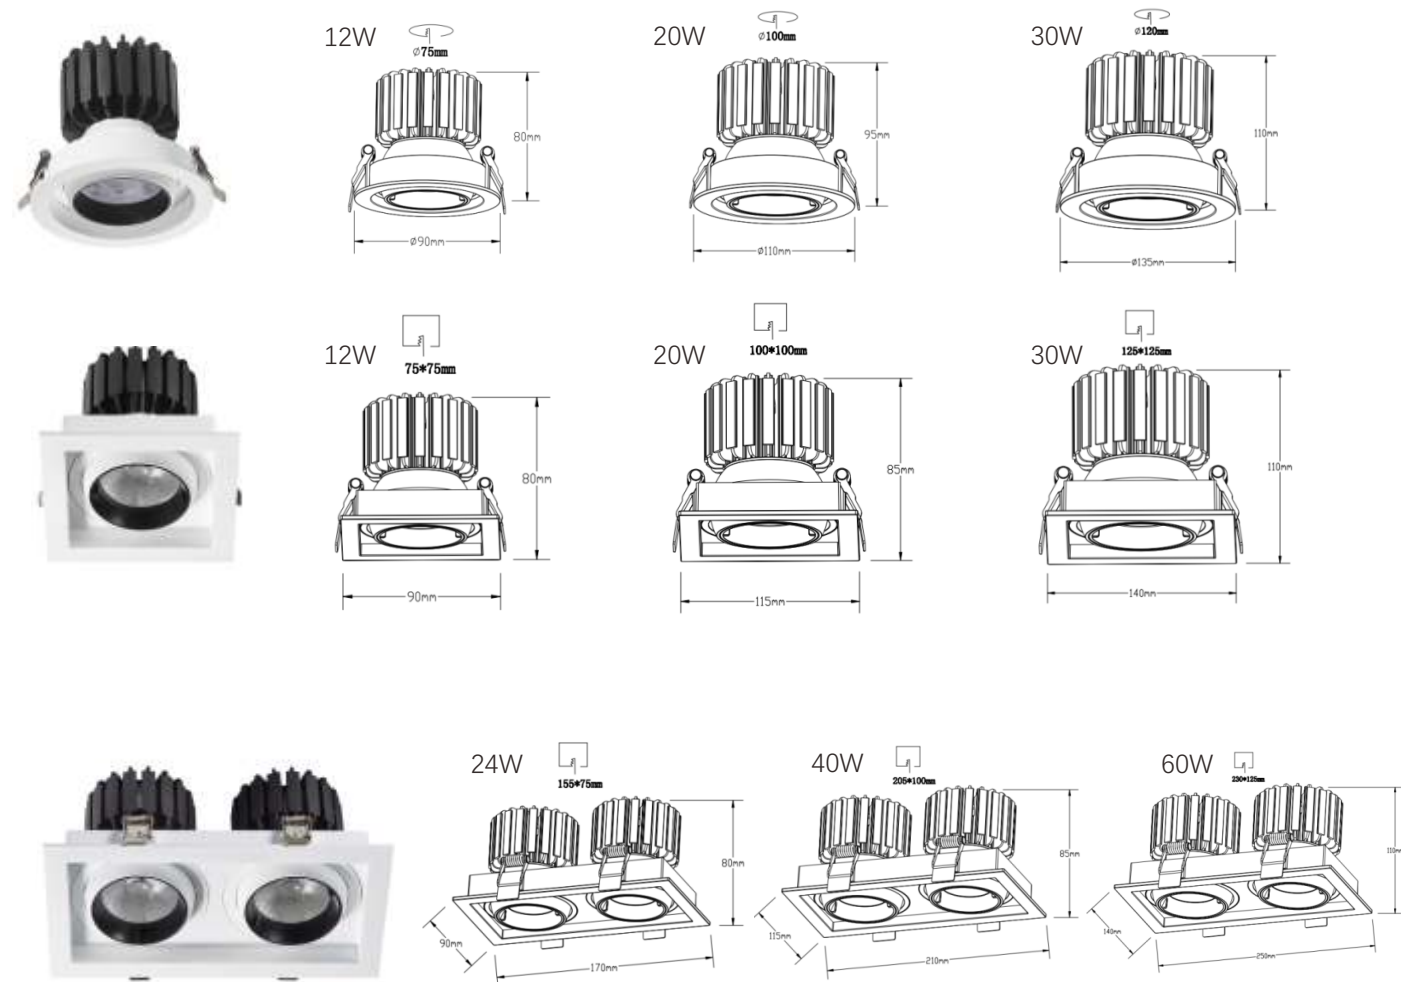

Product code:

T9012TD001-5-10W T9012TD002-12W

T9012TD001-12W T9012TD002-15W

T9012TD001-15W T9012TD002-20W

T9012TD001-20W T9012TD002-30W

T9012TD001-25W T9012TD002-24W

T9012TD001-30W T9012TD002-36W

T9012TD002-60W

Brand chips



CRI: > 90 or >95

Total power: 5W/10W/12W/15W/20W/25W/30W

90LM/W Twins type 24W/36W/60W

LEDs brand: Citizen,Luminus,Osram,Philips

Input voltage: AC100-277V/50-60Hz



CCT: 2700/3000/4000/6000K or customized single CCT

Round/Square/Twins,swiveling type

Beam angle: 15D/24D/38D/60D

Function: On - off/Triac/0-10V/Dali

Bike,bike twins and bike triplets(swiveling type)

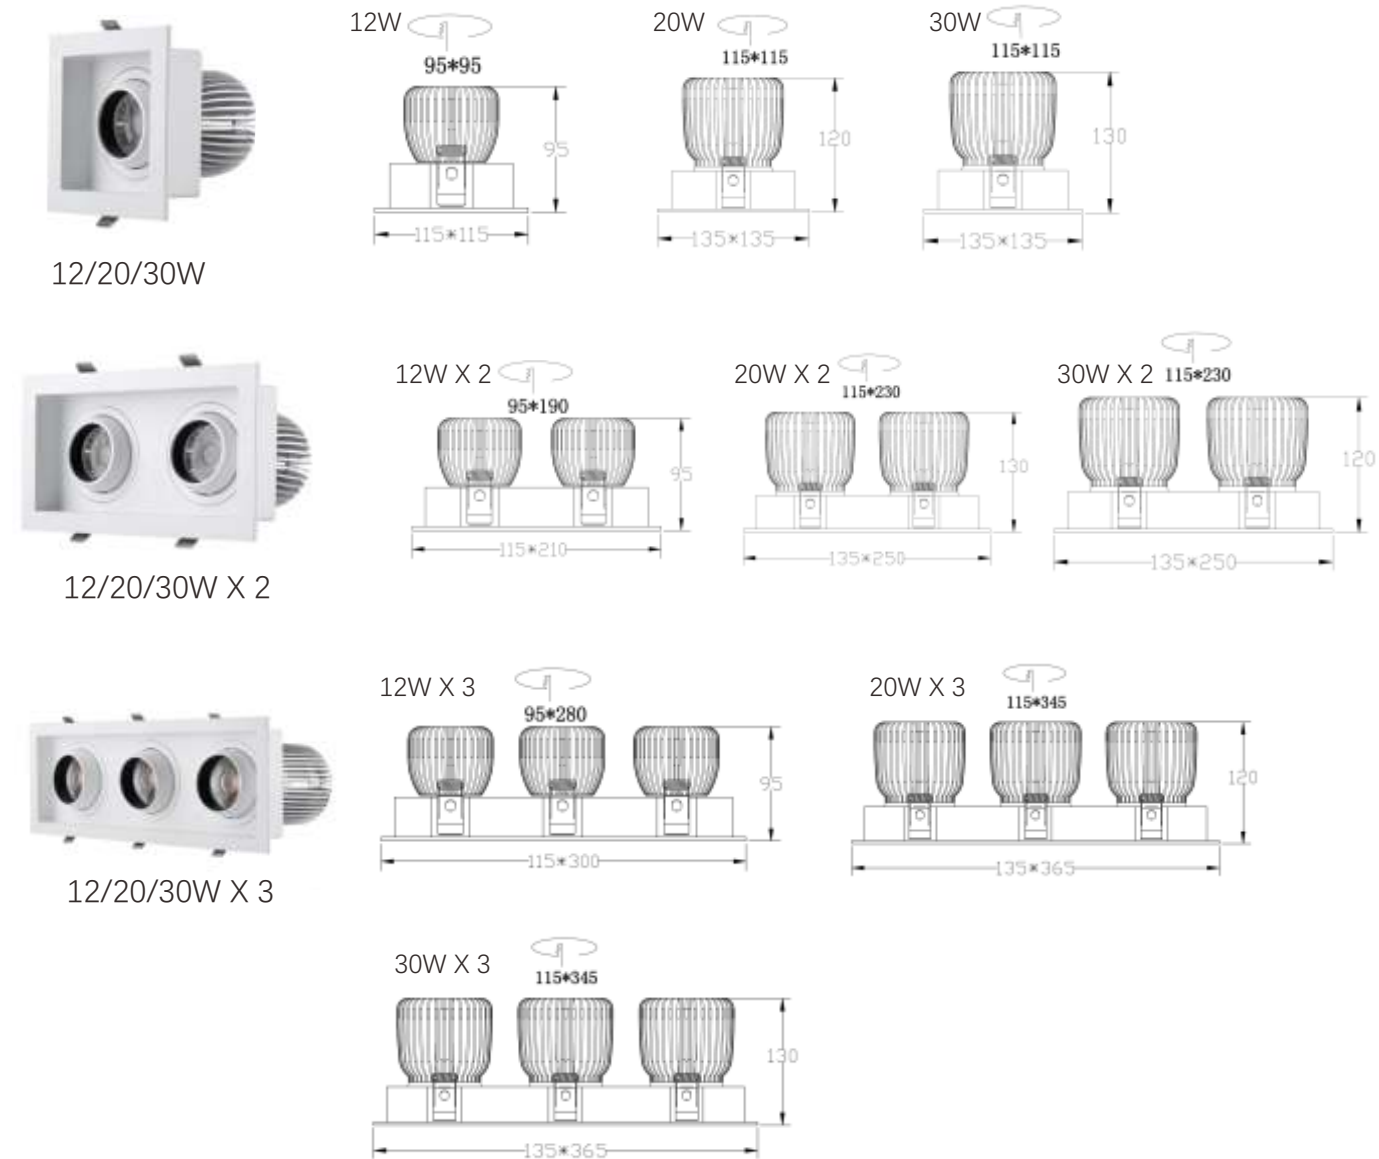

Product code:

T1315GA001-12W	T2513GA002-24W
T1315GB002-20W	T2513GB002-40W
T1315GC003-30W	T2513GC002-60W
T3613GC003-90W	T3613GA003-36W

Brand chips

CREE OSRAM bridgelux LUMILEDS



CRI:	> 90 or >95
Total power:	12/20/30/24/40/60/36/90W 90LM/W
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
	Single/Twins/Triplets,swiveling type
Beam angle:	15D/24D/38D/60D
Function:	On - off/Triac/0-10V/Dali


Elephant



Elephant A

Elephant B

Elephant B

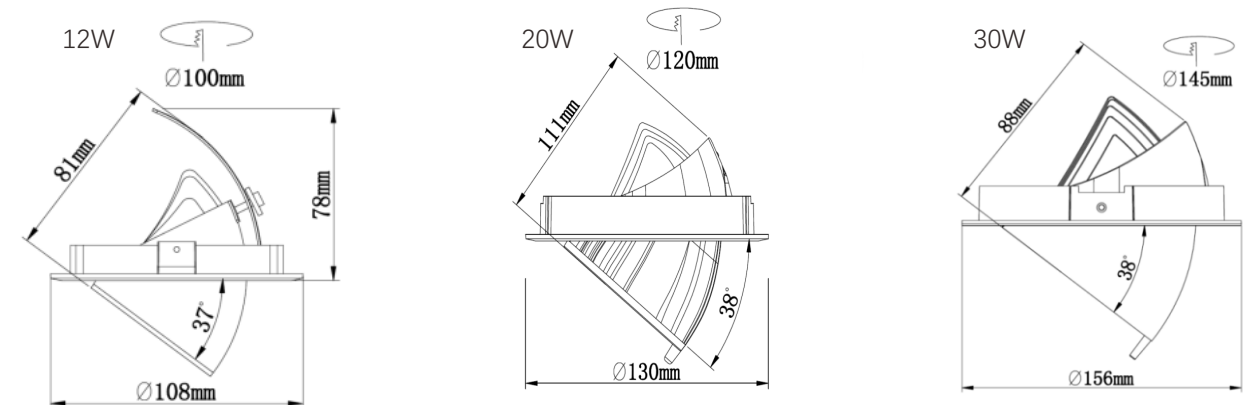

Product code: T1589Z-XP001-012 T1589Z-XP002-020

T1589Z-XP003-030

Total power: 12W/20/30W

LEDs brand: Citizen,Luminus,Osram,Philips

Input voltage: AC100-277V/50-60Hz

Beam angle: 15/24/36D 90LM / W CRI: > 90 or > 95

Function: On - off/Triac/0-10V/Dali


Brand chips

CREE OSRAM bridgelux LUMILEDS



Foldable Downlight


Round

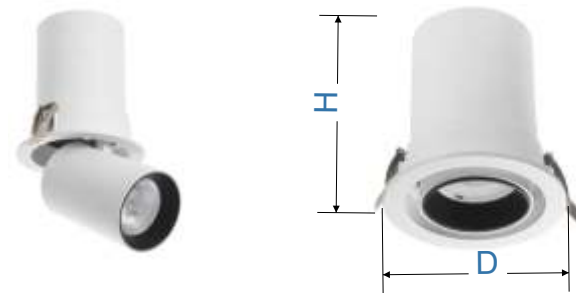

Watt	D	H	Cutout
15W	100	120	95-100
20W	132	146	120-125
30W	160	165	145-150

Unit: mm


Square

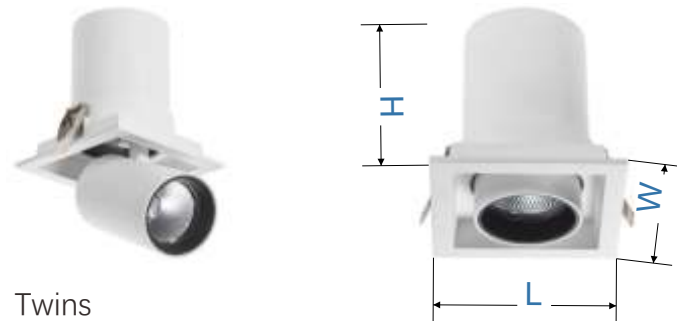

Watt	L	W	H	Cutout
15W	110	110	120	95*95
20W	135	135	146	115*115
30W	160	160	165	145*145


Unit: mm

Twins

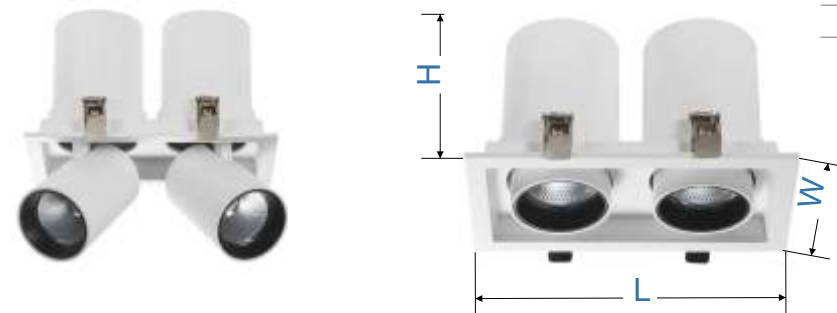

Watt	L	W	H	Cutout
30W	112	200	146	100*190
40W	135	245	146	120*230

Unit: mm

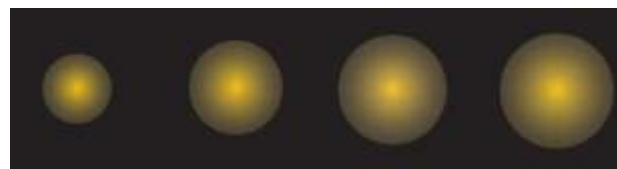

Brand chips



Product code:	P100G-15W/20W/30W/40W
Total power for each head:	15/20/30/W
90LM / W CRI:	> 90 or > 95
LEDs brand:	Citizen, Luminus, Osram, Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Beam angle:	15°/24°/36°
Function:	On - off/Triac/0-10V/Dali
Designed for saving track rail cost	



Self mould hanger bars, cut-out size: 3" 4" 6" 8"

Suit for all of our downlights using when ship to North America market



Self mould junction driver box, fire rated for North America market



Master B


Surface Mounted - Round



Watt	D	H
5W	55	100
10W	75	130
15W	94	150
20W	112	160
30W	142	162

Unit: mm


Surface Mounted - Square

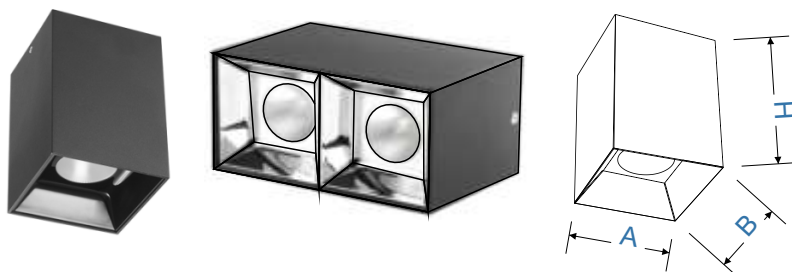

Watt	A	B	H
7W	55	55	120
15W	75	75	140
20W	95	95	150
30W	115	115	160


Unit: mm

Pendant Mounted

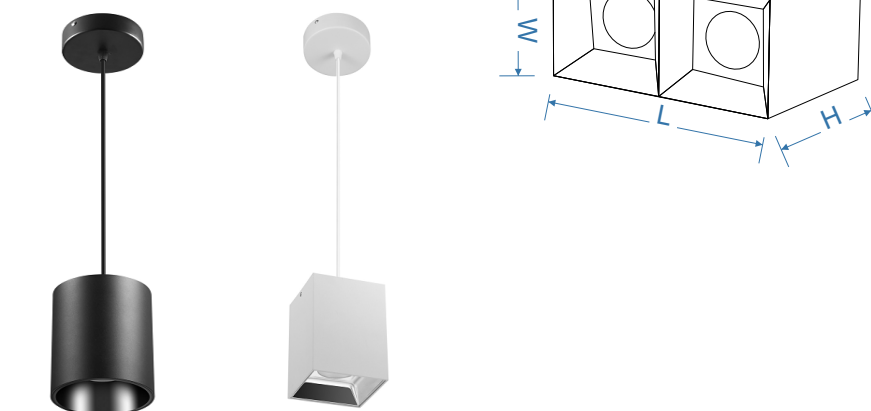

Watt	A	B	H
12W	55	105	120
20W	75	145	95
30W	75	145	140

Unit: mm



Product code:

T9090TD007-5W	T9090TD007-15W
T9090TD007-7W	T9090TD007-20W
T9090TD007-10W	T9090TD007-30W
T9090TD007-12W	

Brand chips



CRI:	> 90 or >95
Total power:	5/7/10/12/15/20/30W 90LM/W
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
	Round/Square/Twins,surface/pendant
Beam angle:	15D/30D/45D
Function:	On - off/Triac/0-10V/Dali

Master C


Surface Mounted - Round



Watt	D	H
10W	90	90
15W	110	120
20W	130	152
30W	170	185
40W	193	193

Unit: mm

Surface Mounted - Square

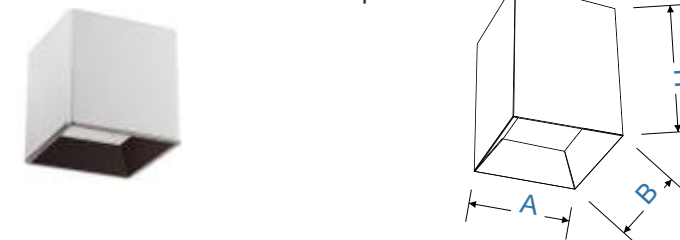

Watt	A	B	H
10W	90	90	95
15W	110	110	120
20W	110	110	120
30W	130	130	135
40W	160	160	165

Unit: mm

Pendant Mounted



Product code:	T9090TD006-5-9W/10W
Total power:	10W/15W/20W/30W/40W
CRI:	> 90 or >95
Total power:	5-9W/10W/15W/20W/30W/40W 90LM/W
LEDs brand:	Citizen,Luminus,Osram,Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
	Round/Square,surface/pendant
Beam angle:	15D/30D/45D
Function:	On - off/Triac/0-10V/Dali

Brand chips



COB Type PAR20/PAR30




PAR20



PAR30



PAR30



Product code:	P6095L-G010W
	P9120L-G020W/G030W
Total power:	10W/20W/30W 90LM/W
LEDs brand:	Citizen, Luminus, Osram, Philips
Input voltage:	AC100-277V/50-60Hz
CCT:	2700/3000/4000/6000K or customized single CCT
Beam angle:	15D/24D/36D CRI > 80
Function:	On - off/Triac

Brand chips



SMD Type PAR30/PAR38




PAR30



PAR38




PAR38



Product code:	P9120G-G035W/G040W
	P1213L-G45W/G60W
Total power:	PAR30 35W/40W PAR38 45W/60W 90LM/W
LEDs brand:	OSRAM 3030 S5
Input voltage:	AC90-305V/50-60Hz
CCT:	2700/3000/4000/6000K/10000K or customized single CCT
Beam angle:	15D/25D/45D/80D CRI > 80
Function:	On - off/Triac Housing Color: White/Black

Brand chips

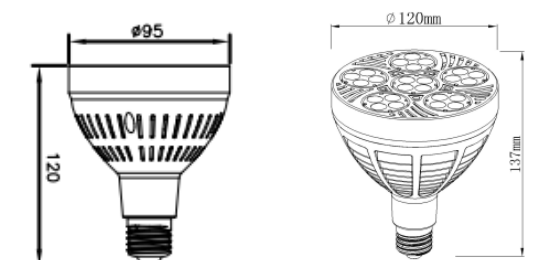

PAR30 PAR38 holder



PAR30/PAR38 holder 2 Wires/ 3 Wires/4 Wires, White/Black




Full Plastic Tri-proof Light



Features:

- > IP65 waterproof /dust proof /explosion proof/ IK08
- > LED driver on tray for easy replacement
- > Multiple Link with double wiring
- > High technology SMD2835 as light source
- > Lumen efficacy: 100lm/w, 125lm/w
- > Dimming: 1-10V / DALI / Microwave Sensor
- > 5 years warranty

Dimension

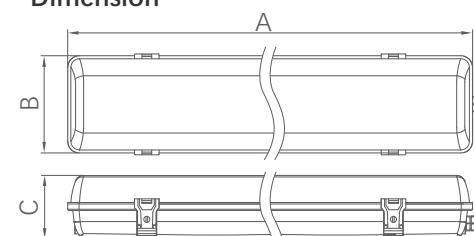

Product Type	A	B	C
60cm/2ft	670	115	72
120cm/4ft	1280	115	72
150cm/5ft	1580	115	72
180cm/8ft	1880	115	72

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
2ft/60cm	20W	2000-2500lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	40W	4000-5000lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	50W	5000-6250lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
6ft/180cm	50W	5000-6250lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
6ft/180cm	75W	7500-9375lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80



Tools free Tri-proof Light



Features:

- > Special clip and cap for free tools installation
- > IP65 waterproof /dust proof /explosion proof/ IK10
- > Special driver tray for easy replacement
- > Multiple Link with double wiring
- > High technology SMD2835 as light source
- > Lumen efficacy: 100lm/w, 125lm/w, 140lm/w
- > Dimming: 1-10V / DALI / Microwave Sensor
- > 5 years warranty

Dimension



Product Type	A	B	C
2ft/60cm	600	83.8	72.8
4ft/120cm	1200	83.8	72.8
5ft/150cm	1500	83.8	72.8
8ft/240cm	2400	83.8	72.8

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
2ft/60cm	22W	2200-3050lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	40W	4000-5600lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	60W	6000-8400lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	40W	4000-5600lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	60W	6000-8400lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
8ft/240cm	100W	10000-14000lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80




T8 Slim Batten Light



Features

- > Patent design for T8 fluorescent fitting
- > End or rear cable entry
- > Easy installation
- > Emitting color : Single or Tri-color
- > Dimming : on-off / 1-10V / DALI/PIR sensor
- > Wiring method : Single or double sides
- > Installation : Surface mounting or Suspension
- > 5 years warranty

Dimension

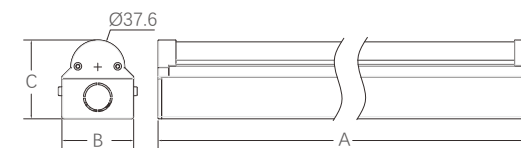


Product Type	A	B	C
60cm/2ft	600	55	58
120cm/4ft	1200	55	58
150cm/5ft	1200	55	58
180cm/6ft	1200	55	58

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
2ft/60cm	10W	1200lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	17W	2050lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	32W	3850lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	28W	3350lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	45W	5400lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	56W	6700lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
6ft/180cm	32W	3850lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
6ft/180cm	62W	7500lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80




Arched Batten Light



Features

- > Special case for college fitting
- > Easy opening design for cover
- > End or rear cable entry
- > Easy installation
- > Emitting color : Single or Tri-color
- > Dimming : On-off / 1-10V / DALI
- > Installation : Surface mounting or Suspension
- > 5 years warranty

Dimension



	A	B	C
1.2M/4ft	1200	215	77
1.5M/5ft	1500	215	77

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
4ft/120cm	17W	1950lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
4ft/120cm	32W	3700lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	25W	2850lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
5ft/150cm	50W	5750lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80




Slim Panel Light



Features

- > TP(a) fireproof with PC diffuser
- > Low glare UGR<19
- > SMD4014 as light source
- > PMMA LGP as light guide
- > Extra thin aluminum frame
- > Lumen efficacy :100LM/W, 120LM/W
- > Dimming : on-off / 1-10V
- > Installation : Recessed / surface mounting / suspension
- > 5 years warranty

Dimension



Product Type	B	B	B
2x2ft	603	603	10
1x4ft	303	1212	10
2x4ft	603	1212	10

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
2ft*2ft	30W	3000-3750lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80
2ft*2ft	40W	4000-5000lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80
1ft*4ft	30W	3000-3750lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80
1ft*4ft	40W	4000-5000lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80
2ft*4ft	50W	5000-6250lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80
2ft*4ft	60W	6000-7500lm	AC100-277V	>0.95	3000-6000K Tri-color	Ra80




Backlit Panel Light



Features

- > Special ultra flat casing: 32mm
- > SMD2835 as light source
- > 180° degree lens on PCB for Uniform lighting
- > Tri-color is available
- > Low glare UGR<19
- > Lumen efficacy :105lm/w, 120lm/w, 140lm/w
- > Dimming : on-off / 1-10V/DALI
- > 5 years warranty

Dimension



Product Type	A	B	C
600x600	595	595	32
620x620	620	620	32
300x1200	295	1195	32
600x1200	595	1195	32

Unit:mm

Datasheet

Product Type	Watt	Lumen	Input Volt	PF	CCT	CRI
595*595mm	30W	3150-4200lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
295*1195mm	30W	3150-4200lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
620*620mm	30W	3150-4200lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80
595*1195mm	50W	5250-7000lm	AC200-240V	>0.95	3000-6000K Tri-color	Ra80

